



## POM-2744P-C33-R Omni-Directional Microphone

**3541 Stop Eight Road ● Dayton, Ohio 45414** 



## **Product Overview**


- 6mm overall diameter and 2.7mm height with pin terminals
- -44 dB sensitivity for use in most environments
- Wide 2 to 10 VDC operating voltage and 50-16,000 Hz frequency response
- >60 dB signal-to-noise ratio and 2.2 kOhm impedance
- Omni-directional polar pattern for great off-axis response
- Internal 33 pF capacitor filters out GSM TDMA noise

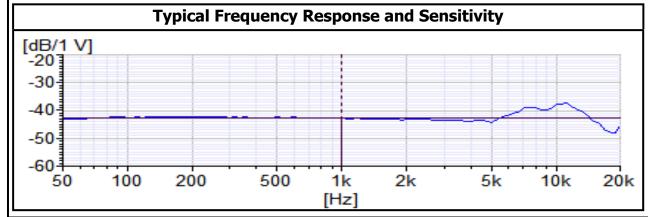









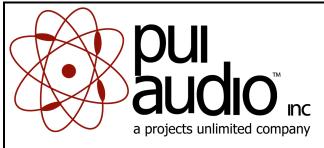

## POM-2744P-C33-R Omni-Directional Microphone

Mechanical and Environment Testing					
Test Description	Test Condition				
High Temperature	70°C with random humidity for 200 hours				
Low Temperature	-40°C with random humidity for 200 hours				
Humidity	40°C with 90% relative humidity for 200 hours				
Vibration	3 mm movement for 3 minutes in each of 3 axis				
Drop Test	70 cm free fall onto 20 mm thick board, two directions				
Temperature Cycle Test	-10°C to 50°C, 5 cycles				

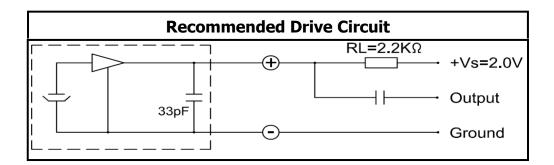


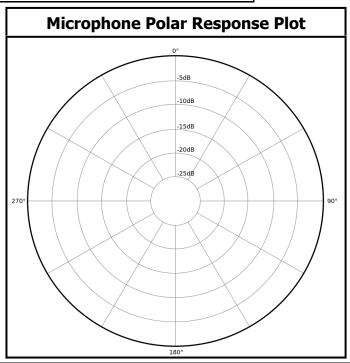


SPECIFICATIONS							
PARAMETERS	VALUES	UNIT					
DIRECTIVITY	OMINI	-					
SENSITIVTY	-44 ± 3	dB					
STANDARD OPERATING VOLTAGE	2	Vdc					
MAX OPERATING VOLTAGE	10	Vdc					
CURRENT CONSUMPTION (MAX)	0.5	mA					
IMPEDANCE	2.2	KOhm					
SIGNAL TO NOISE RATIO (MIN.)	60	dB					
TERMINAL	PIN	-					
INTERNAL CAPACITOR	33	pF					

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED. ©2003, Projects Unlimited Inc.

REVISION HISTORY							
LTR	DESCRIPTION	DATE	APPROVED				
-	RELEASED FROM ENGINEERING	3/23/2006					
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/6/2010	B.R.				

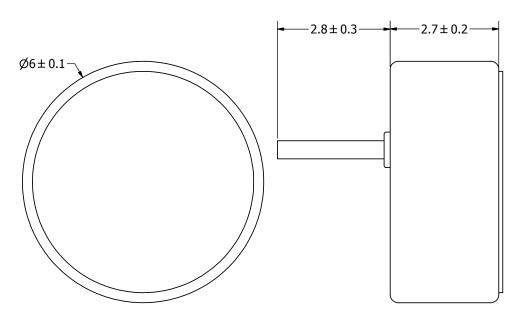

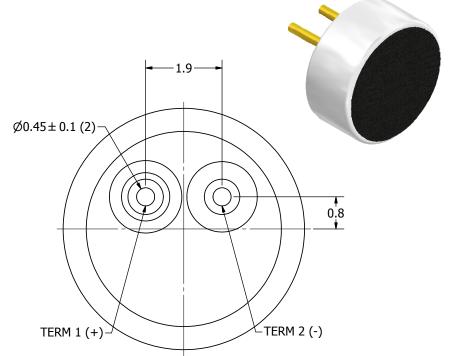

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- 4. MICROPHONE CLOTH OVER FACE IS IP51 RATED.

UNLESS OTHERWISE		Designed by	Date	Checked by	Date	Approved by	Date	D	rawn Date
SPECIFIED:	SIZE	T.G.	3/23/2006	B.R.	3/23/2006	E.P.	3/23/200	5 10	0/6/2010
DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND	A3	pul.			POM-2744P-C33-R				
ANGLES ARE ±3°.	, ,		או ולוכ	<b>M</b>	Micro	ahana	Е	dition	Sheet
POM-2744P-C33-R.idw			a projects unlimited co	Inc ompany	Micro	Jiione		-	1/1