

MIC5524

Single High-Performance 500 mA LDO

General Information

The MIC5524 is a low-power, low-dropout regulator designed for optimal performance in a very-small footprint. It is capable of sourcing 500 mA of output current and only draws 38 μ A of operating current to do so. Ideal for battery-operated applications, the MIC5524 offers 2% accuracy, extremely-low dropout voltage (260 mV @ 500 mA), and can regulate output voltages down to 1.0V. The MIC5524 is a μ Cap design, operating with very-small ceramic output capacitors for stability, reducing required board space and component cost for space-critical applications. The MIC5524 has an operating junction temperature range of -40°C to 125°C .



Features

- Input voltage range: 2.5V to 5.5V
- Fixed output voltages down to 1.0V
- 500 mA guaranteed output current
- High output initial accuracy ($\pm 1\%$)
- High PSRR: 80 dB
- Low quiescent current: 38 μ A
- Stable with 2.2 μ F ceramic output capacitors
- Low dropout voltage: 260 mV @ 500 mA


Applications

- Portable medical devices
- Smart devices (watch, phones, wearables)
- Portable communication equipment
- Bluetooth[®] earphones

Benefits

- Fast transient response
- High-power supply noise rejection ratio
- Auto discharge and internal enable pull down
- Thermal-shutdown and current-limit protection

MIC5524 Block Diagram

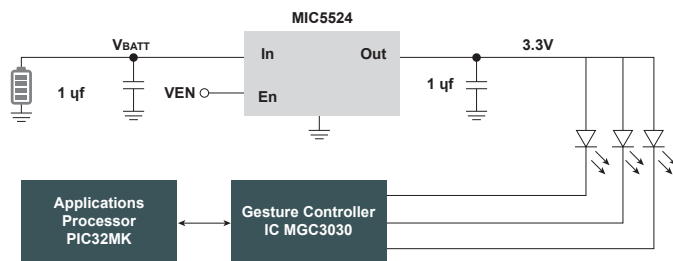

Smartphones and portable applications (GPS, Entertainment systems) now have Gesture Controllers to control certain features of the end applications



The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies. © 2018, Microchip Technology Incorporated. All Rights Reserved. 6/18 DS20006040A